


200 Watt Photovoltaic Module

EVERLIGHT ELM-200P Series

EVERLIGHT ELM-200P is designed specifically for on-grid residential systems where a combination of high module efficiency and outstanding appearance is desirable. Utilizing 60 cells (150 x 150mm) configured geometrically in a 10 x 6 matrix connected in series. An anti-reflective coating, provides a uniform blue color and increases the absorption of light in all weather conditions. Designed to withstand rigorous wither conditions; the multifunctional junction box avoids from eroding by moisture or humidity; torsion –proof, anodized and corrosion –free aluminum frame tightened by inner corner without using any screws, making EVERLIGHT ELM-200P great appearance and less power decrease during warrant period.

Module Diagram

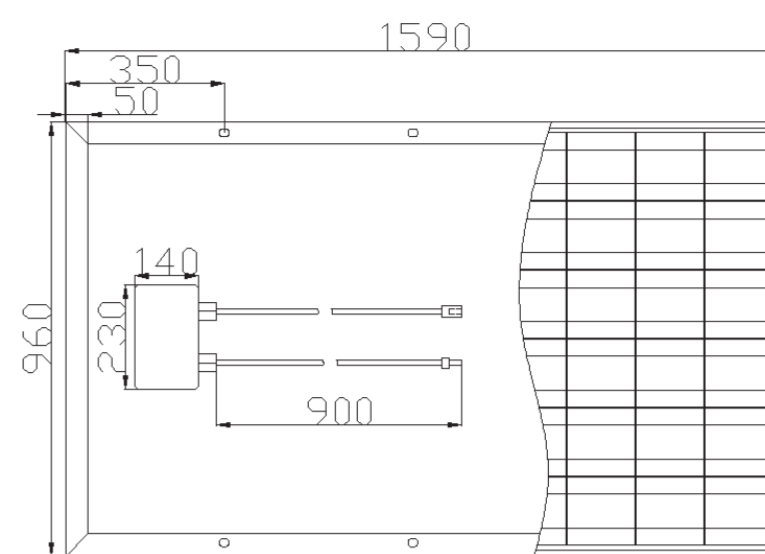

Graph

TYPICAL ELECTRICAL CHARACTERISTICS			
	ELM-200P-1	ELM-200P-2	ELM-200P-3
Maximum power	180W	190W	200W
Voltage at max. power	28.6 V	28.6 V	28.6 V
Current at max. power	6.29A	6.64A	6.98A
Open circuit voltage	36.2V	36.2V	36.2V
Short circuit current	7.10A	7.50A	7.90A
Temperature coefficient of Isc	(0.065±0.015)%/°C		
Temperature coefficient of Voc	-(160±20)mV/°C		
Temperature coefficient of power	-(0.5±0.05)%/°C		
Max. oper. voltage	1000V		
Operating temperature	-40/+85 °C		
Resistance	227g steel ball down from 1m height and 60m/s wind		

PERFORMANCE			
Model	ELM-200P-1	ELM-200P-2	ELM-200P-3
Rated power	180W	190W	200W
Tolerance	±5%	±5%	±5%
Module efficiency	13.3%	14.1%	14.8%
Nominal voltage	24V	24V	24V
Warranty	Pm is not less than 90% in 10 years and 80% in 25 years		

MECHANICAL CHARACTERISTICS	
Dimensions(mm)	1590×960×50
Overall tolerances	±3mm
Weight(Kg)	22.0
Frame	Clear anodized aluminum alloy type 6063T6. Silver Universal frame.
Solar Cells	60 cells (150 x 150mm) configured geometrically in a 10 x 6 matrix connected in series.

Test conditions: @STC 1000W/m², AM1.5, 25°C

Product Standards: CE certified, TÜV according to IEC 61215 expected by Oct. 2007.

